



## Atlas LED Linear ATL Series

### Features

This low profile, clean appearance, surface mounted wrap provides a wide distribution of light. It can be used in various applications including offices, corridors, garages, kitchens and public spaces. Fixture mounts to a standard junction box (not included).

### Construction

Housing is die-formed of 22-gauge steel. Power supply connections must be made inside the fixture wire way or inside a junction box (not included).

### Finish

Satin nickel or oil-rubbed bronze frame finish.

### Diffuser

White diffuser is made of engineered LED acrylic material.

### Electrical

Input 120 VAC / 60 Hz.  
Compatible with TRIAC or ELV dimmers.

### LED

Integrated LED modules capable of producing:  
39W, 3200 source lumens  
3000K (CCT). Rated for 50,000 Hrs., 90 CRI.

### Certification


cETLus listed for indoor damp locations.  
ENERGY STAR® qualified  
Title 24/JA8 Compliant

### Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date-of-purchase.

**Specifications and dimensions subject to change without notice.**

LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

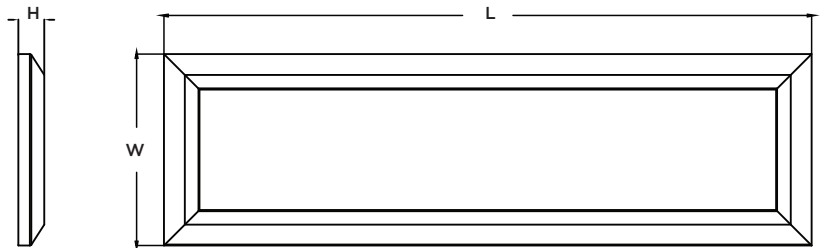

## Ordering Information:

Satin Nickel	Oil-Rubbed Bronze	LED	Source Lumens	CCT	L	W	H
ATL12483200L30D1SN	ATL12483200L30D1RB	39W	3200	3000K	50-3/8"	15"	2"