

# Thayer Linear Chandelier

F3326/5 1.0

GENERATION LIGHTING

## Chandelier


### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

**CAUTION - RISK OF FIRE**  
 This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.  
**Use minimum 90°c supply conductors.**

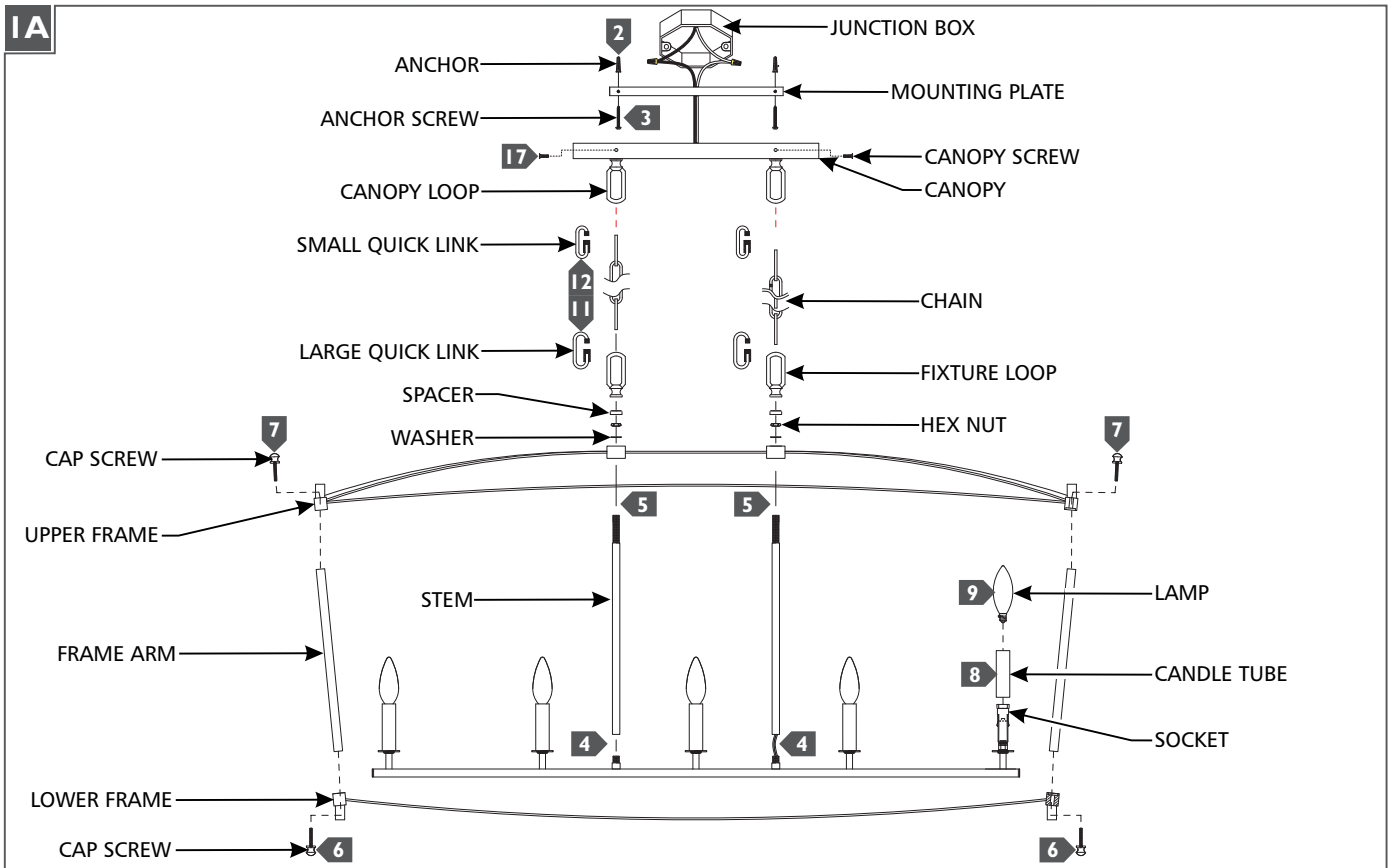

- 1 Temporarily install the mounting plate to the junction box and mark the anchor hole locations through the mounting plate holes, then remove the mounting plate.
- 2 Drill appropriate sized holes at the marked locations and install the anchors.
- 3 Secure the mounting plate to the junction box and screw the anchor screws into the anchors.
- 4 Feed the cord through the stems, then screw the stems onto the fixture.
- 5 Feed the cord through the upper frame, washers, hex nuts, spacers, and fixture loop, then screw the hex nuts onto the stems followed by the fixture loops.
- 6 Insert the frame arms into the lower frame and screw the cap screws into the lower frame.
- 7 Insert the upper end of the frame arms into the upper frame and screw the cap screws into the upper frame.
- 8 Install the candle tubes by slipping them over the sockets.
- 9 Screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage information.
- 10 Determine the wanted height of the fixture and remove a portion of the chain from the bottom by opening a link with pliers.
- 11 Install the large quick link to bottom end of the chain, then secure the large quick link onto the fixture loop.
- 12 Install the small quick link onto the remaining end of the chain, then secure the small quick link onto the canopy loop.
- 13 Weave the cord through the chain, canopy, and out of the junction box. Trim the cord leaving enough to make electrical connections.
- 14 Connect the fixture to a suitable ground in accordance to local electrical codes.
- 15 Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 16 Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 17 Neatly place all wires into the junction box/canopy, place the canopy onto the mounting plate, and secure it in place using canopy screws.

**SAVE THESE INSTRUCTIONS!**

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347

**[www.generationlighting.com](http://www.generationlighting.com)**

© 2019 Generation Lighting. All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.