



# CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL #5019-OS-CL-MWP

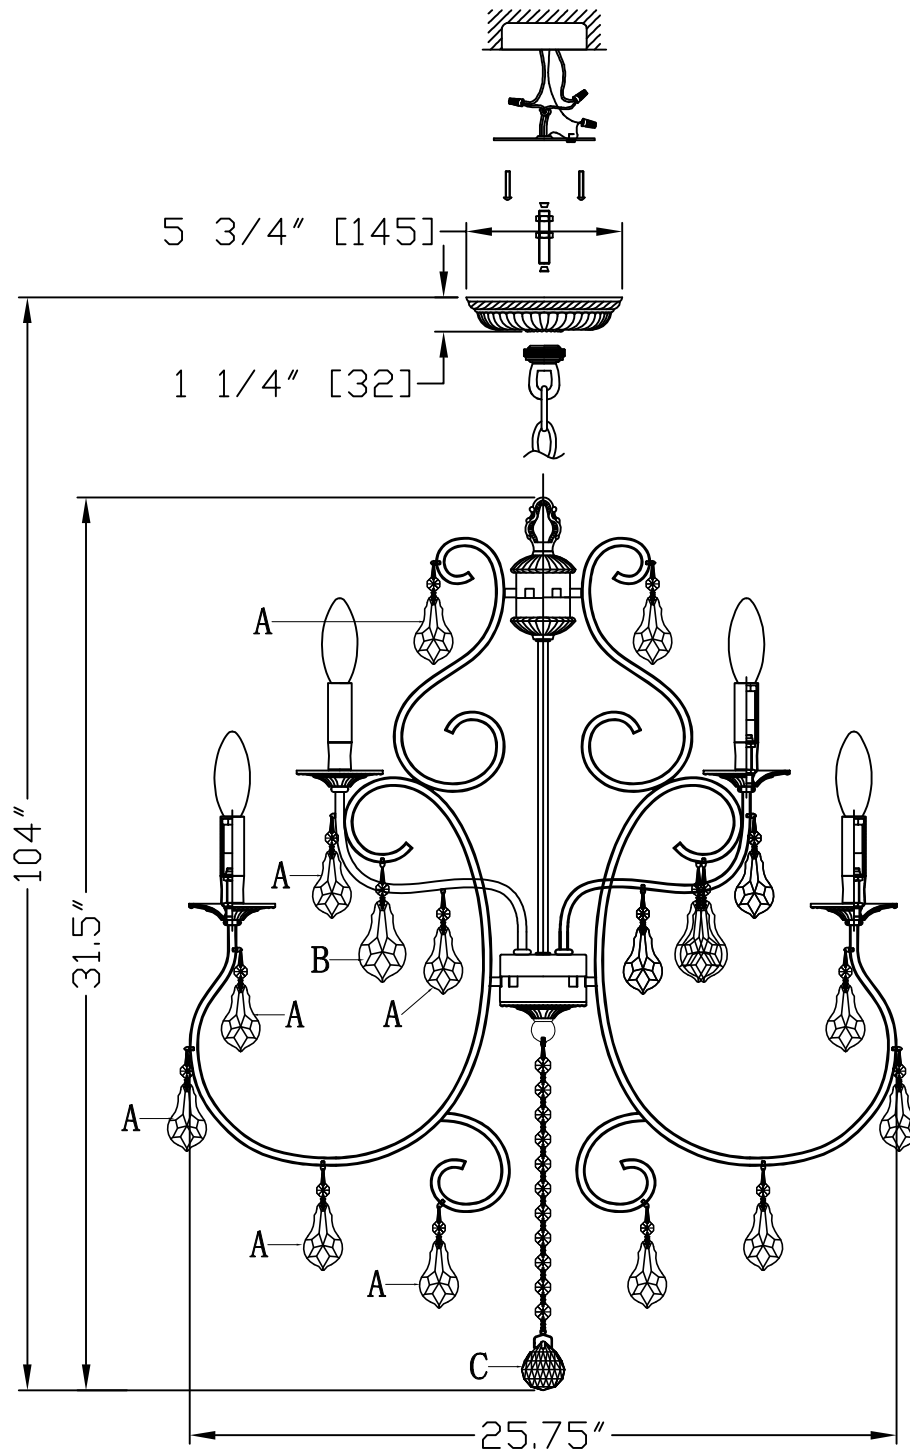

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 9 - Cand.Bulb

40 Watts Recommended

60 Watts Max

USE LED BULBS FOR EXTENDED USE

This fixture is damp rated

### How to Install

1. Place the frame on a soft cloth covered table before installation.
2. Spread the arms at equal spacing and then place the top notched cap over the top of arms. Make sure the slot fits over the arm.
3. Place the top cover over the notched cap and secure with loop.
4. Place the bottom notched cap over the bottom arm and secure with a hexnut. Make sure the slot fits over the arm.
5. Place the bottom cover over the bottom notched cap and secure with finial.
6. IMPORTANT Apply crystal sets in alphabetical order.

### Crystal sets

- A. 36 piece. (1)14mm+(1)63mm.
- B. 6 piece. (1)14mm+(1)76mm.
- C. 1 piece. (1)14mm+(1)40mm.

A=  (1X63mm Pendant+1X14mm Jewels)\*36pcs

B=  (1X76mm Pendant+1X14mm Jewels)\*6pcs

C=  (1X40mm Pendant+11X14mm Jewels)\*1pcs



**WARNING:** This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

# CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS

PART NUMBER MODEL #5019-OS-CL-MWP

## Part Number

### Part Numbers

- A. (1)–Mounting hardware
- B. (1)–Canopy; W5.7”XH1.26” (XSU50130SCAN5.75IN.)
- C. (1)–Chain; 3.8mm; (XSU50130SCHA3.8MM.)
- D. (1)–Loop(XSU50130SLOO)
- E. (2)–Top Cover;  $\phi$ 2.36”X0.78”
- F. (1)–Top Wire house
- G. (3)–Top Arm
- H. (9)–Metal Candle Sleeves;  $\phi$ 0.87”X2.17”(XSU50110SMCDL2IN)
- I. (9)–White plastic Candle Sleeves;  $\phi$ 0.87”X2.17”(XSU50110SPCDL2IN)
- J. (6)–Bottom Arm
- K. (1)–Bottom Wire house
- L. (1)–Finial; (XSU50190SFIN)
- M. (1)–Top Notched cap;  $\phi$ 1”X1”
- N. (1)–Bottom Notched cap;  $\phi$ 3.15”X1”
- O. (1)–Bottom Cover;  $\phi$ 3.15”X0.6”

