



see what Delta can do™

# HAND SHOWER/ SHOWER HEAD COMBO

- 9-Spray Setting Hand Shower/  
Shower Head Combo
- Certified Dual Check Valves

## FEATURES:

- ActivTouch® Handshower
- Touch-Clean® Nozzles

## STANDARD SPECIFICATIONS

- Maximum 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Combination shower with three spray settings - pause is a non-positive shut-off
- 3 buttons create 8 unique sprays plus a pause setting, reducing water to a trickle
- Adjustable shower arm mounting for hands-free showering
- Soft touch non-slip grip
- 60"-82" (1524 mm - 2083 mm) stretchable metal hose
- Diverter allows for single or shared operation of shower head and hand shower

## WARRANTY


- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) - 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



## COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.3
- EPA WaterSense®


◆ Your Delta Faucet handshower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3 and ASME A112.18.1/CSA B125.1. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.

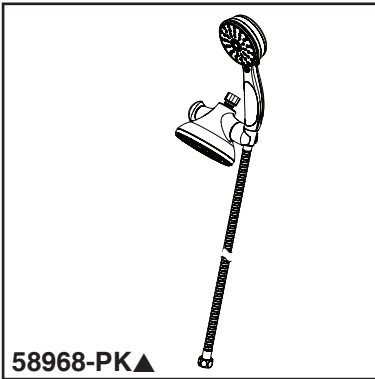

58968-PK▲

Submitted Model No.: \_\_\_\_\_

Specific Features: \_\_\_\_\_

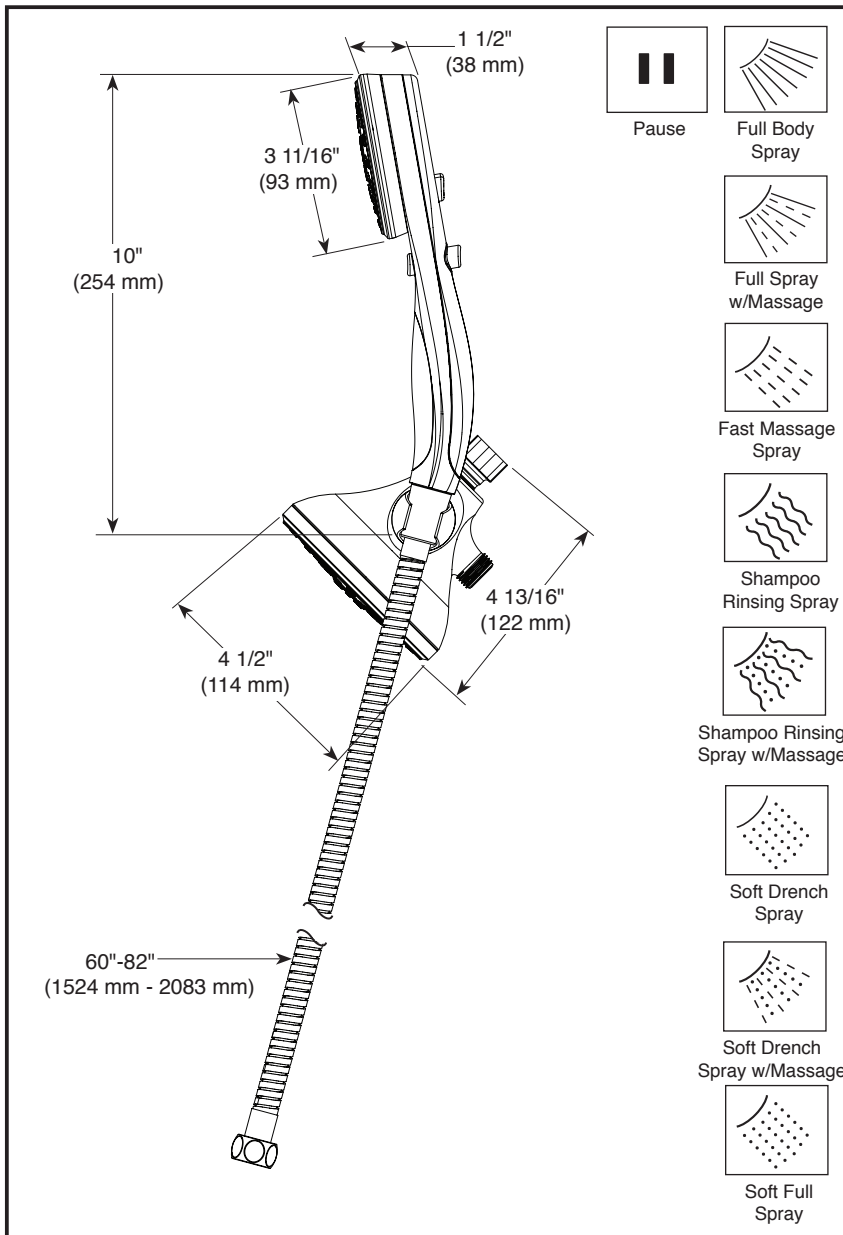

▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.deltafaucet.com](http://www.deltafaucet.com) for finish options and product availability.