


One piece, single threshold model for recessed installation. Features 1" flange on three remaining sides. Center drain.

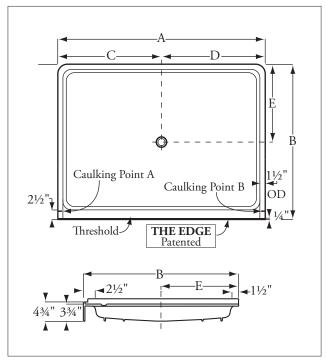

Mode	ΙΑ	В	С	D	Е	WT.	
3636F	36"	35¾"	18"	18"	18"	38	
3642F	42"	36"	21"	21"	18"	45	
4242F	42"	42"	21"	21"	191⁄2"	50	
3448F	48"	34"	24"	24"	17"	44	
3648F	47¾"	351/2"	24"	24"	18"	36	
4248F	47¾"	41¾"	24"	24"	21"	47	
4848F	47¾"	48"	24"	24"	24"	50	
3460F	60"	34"	30"	30"	17"	50	
3660F	60"	351/2"	30"	30"	17¾"	50	
4260F	59¾"	41 ½"	30"	30"	20¾"	60	
Oh a da ada							

Standards:

I.A.P.M.O. International Association of Plumbing and Mechanical Officials File No. 0687.

ANSI American National Standards Institute - Specifications Z-124.2. HUD/FHA National Specifications UN-73.



Florestone Molded Fiberglass Shower Receptors with THE EDGE

Architect's Specifications

Furnish and install molded fiberglass one piece shower unit manufactured by Florestone Products Company. Unit to be manufactured of gel-coated fiberglass meeting Class C Flame Retardance and to be supplied with slip-resistant floor laminated for extra rigidity. Color will be white (unless otherwise specified). Unit to be supplied with a 2" PNC non-caulk drain.

Standard Color: White

Optional Colors

Color matching most major manufacturers' colors are available.

Colors

Standard: White, Bone Special: Granite (see pg. 12)

Dimensions may vary \pm 1/4" inch. Please check unit before installation.

Place receptor on a bed of mortar or plaster for warranty compliance.

Dimensions subject to change without notice.

Contact Florestone Products to verify product specifications.



FLORESTONE PRODUCTS CO., INC.

2851 Falcon Drive • Madera, CA 93637					
T.	559.661.4171	•	T.	800.446.8827	
F.	559.661.2070	•	f	lorestone.com	