



ASSEMBLING & INSTALLATION INSTRUCTIONS

The drawing shown may not exactly match the product enclosed.
However, the installation instructions do apply to this product.

40595 40195 40596 40196

- ◆ **WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**
- ◆ **ATTENTION! COUPER LE COURANT AU FUSIBLE OU UN DISJONCTEUR.**

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker box. Remove old fixture and all hardware from Junction Box. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
2. Thread pipe(C) into coupling(F) until snug, the other end of thread pipe(C) with loop attached into single bar (D) until snug. Place lock washer (B) over end of pipe protruding through single bar, lock it securely with the hex nut(A).The side of the Mounting plate marked "GND" must face to out(down).
3. Slide the pipe thread(O) into the electrical wires, lock it securely with the hex nut. Slide the tube(N)/square shim(M)/small ring(L) into the electrical wires, lock it securely with the small ring. Slide the pipe(K)/(J)/(H)/ring(I) /canopy(G) and assembly single bar into the electrical wires, by turning them clockwise until tight.
4. Take this lamp assembly to ceiling junction box with junction box screws (E) tighten screws securely with screwdriver. **The junction box is not included.** Connect the electrical wires as Shown in **Fig.2**, making sure that all wire nuts are secured. You may have to wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise connect fixture's ground wire directly to the Mounting plate with the green screw provided.
5. After wires are connected, tuck them carefully inside the Junction Box, raise the canopy (G) all the way to the ceiling, raise the loop (I) onto coupling protruding through the canopy.
6. Attach the check ring(R) and shell(S) insert to the socket wrench(Q). Raise the square frame(U) and glass shade(T) insert the lamp holder, lock them securely with the socket wrench(Q), then remove the socket wrench and **save it.**
7. Install the light bulbs(Not included) in accordance with the fixture's specifications. **NOTE: DO NOT EXCEED THE SPECIFIED WATTAGE!**

Your installation is now complete. Return power to the junction box and test the fixture.

FIG.1


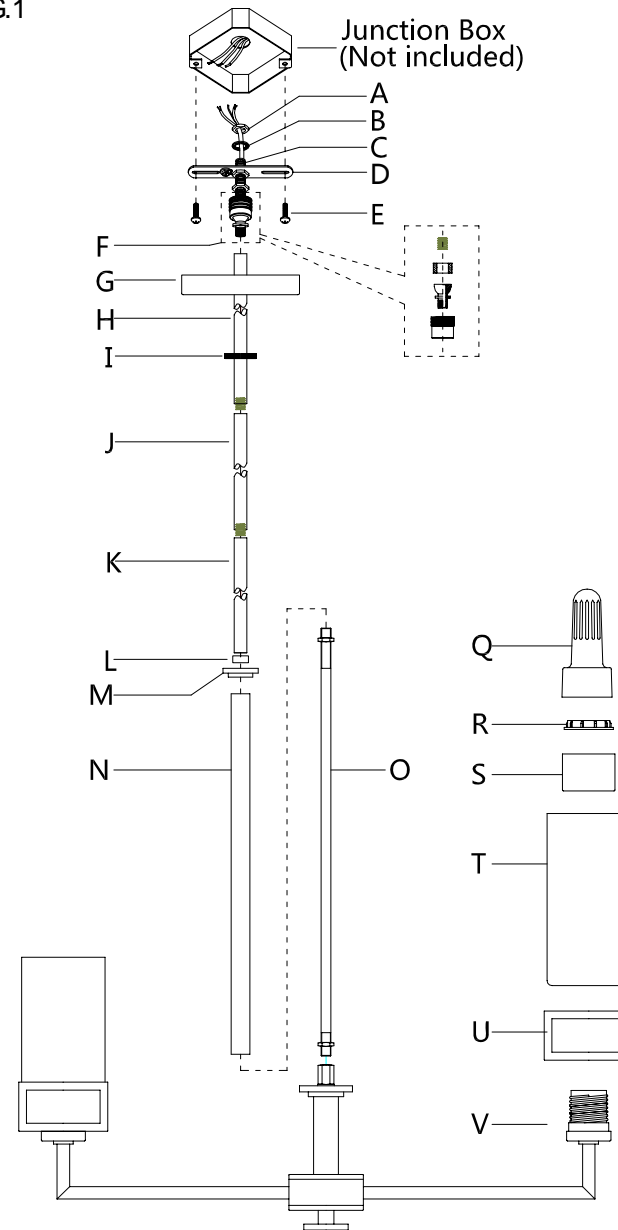


FIG.2

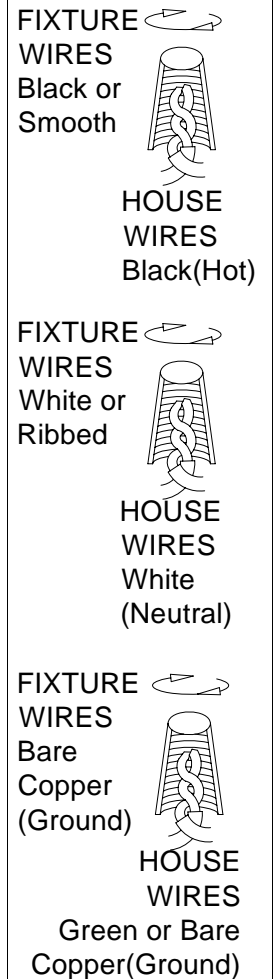

Thank you for purchasing a **LIVEX** product.
 Need assistance with parts or assembly? Please call customer service at: **800-761-8056**
 Or visit us online at: WWW.LIVEXLIGHTING.COM