1014-1012 **MAVERICK**™ **1.0**

MANSFIELD®

Elongated Front, SmartHeight™ Vitreous China, Two-Piece Toilet

FEATURES

- Uses almost 40% less water than conventional toilets
- 1.0 gpf / 3.8 lpf high efficiency water consumption
- Elongated front SmartHeight[™] bowl
- 3' flush tower
- · Pilot operated anti-siphon fill valve
- 12' rough-in
- · Model 79 chrome-plated, metal push button actuator
- · 2' glazed trapway
- The Mansfield® limited lifetime warranty on china, One-year limited warranty on tank trim
- · Available in White only



COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS		
1014-1012	Elongated front, SmartHeight™ two-piece toilet. Includes top chrome-plated, metal push button actuator. Less toilet seat and supply.	The section Map in		
1014	Elongated front, SmartHeight™ toilet bowl only. Less toilet seat and supply.	HIGH EFFICIENCY C BY STORY OF THE STORY OF T		
1012	Tank and cover only, with top metal push button actuator. Less supply.	IUILLI		
TANK TRIM & REPLACEMENT PARTS				
79	Chrome-plated, metal push button actuator			
209	Flush tower			
90-9	Fill valve			
1012/3012-LID	Tank lid			

1014-1012 **MAVERICK**™ **1.0**

MANSFIELD®

Elongated Front, SmartHeight™ Vitreous China, Two-Piece Toilet

SPECIFICATIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
1014-1012	Elongated front, SmartHeight™ (1.0 gpf/3.8 lpf) two-piece toilet	HIGH EFFICIENCY TOLLET WEST CONTROLLET WHO THE PROPERTY OF T

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	3' Flush tower
WATER USAGE	1.0 gpf / 3.8 lpf
WATER SURFACE AREA	6-1/4' X 9'
ROUGH-IN	12'
MAP RATING	800 grams

TRAP DIAMETER	2'
TRAP SEAL	2-3/8'
SHIPPING WEIGHT	Model 1014 - 58 lbs. (26 kg) Model 1012 - 34 lbs. (15 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited One Year

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

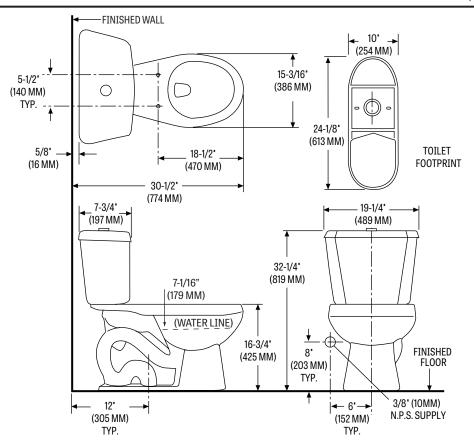

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.