

# NYLI-6

## 6" Medium Base Cylinder

Source: 250W max.

R/BR LED or Incandescent

Type

Project

Catalog No.

Notes

### PRODUCT DESCRIPTION

Architectural grade cylinder with medium base socket attached to a deep cone reflector or baffle for optimal visual comfort. 2-piece cylinder allows for easy installation and multiple mounting options. Use with incandescent BR/PAR lamps or with energy efficient long life LED lamps.

### FEATURES

- Medium base socket rated up to 250W
- Compatible with incandescent or LED lamps
- Can be factory labeled with reduced wattage
- Reflector or baffle
- 5-Year Limited Warranty

### CONSTRUCTION

**Cylinder Cap:** High quality 0.040" steel cap with universal slots to allow for direct mounting to junction box for surface mount. Incorporates all thread in the center for the installation of a cable or pendant rod kit for the corresponding mounting method. Three screws on the bottom of cap secure cylinder body to cylinder cap. (Adjustable with flathead screw drive)

**Cylinder Body:** 0.040" steel cylindrical body with three keyhole slots allowing body to be installed to cylinder cap. Spring brackets accept torsion wing trim springs. Four butterfly clips also accommodated for spring-less trims.

### INSTALLATION

**Cable Mount:** Cylinder comes with 8' of field cuttable aircraft cable and offset cable for power and dimming.

**Pendant Mount:** Cylinder includes a canopy and 7' (consisting of (3) 12" and (2) 24") of internally threaded rods.

**Surface & Wall Mount:** Cylinder is supplied with hardware to mount directly over junction box.

### ELECTRICAL

**Input Voltage:** 120V

**Socket:** Medium base

**Lamp:** R/BR/PAR LED or incandescent  
(PAR30 short neck is not compatible)

**Wattage:** 250W max.

(can be labeled for reduced wattage)

**Dimming:** Varies depending on lamp.

### LISTINGS AND WARRANTY

- cULus Listed for Damp Locations (Wall mount is listed for wet locations)
- [5-Year Limited Warranty](#)



### PRODUCT IMAGES



**NYLI-6C**  
Cable Mounted



**NYLI-6P**  
Pendant Mounted




**NYLI-6S**  
Surface Mounted



**NYLI-6W**  
Wall Mounted

### PRODUCT DIMENSIONS

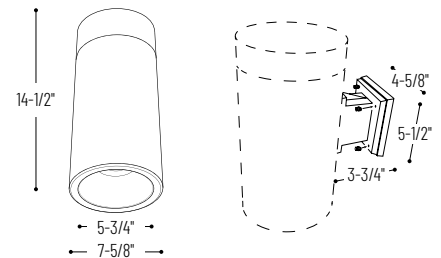

## 6" Medium Base Cylinder

Mounting Type	Lamp Source / Max. Wattage	Reflector Type	Reflector / Flange Finish	Cylinder Finish	Cable Mount Only
NYLI-6C Cable	I = Incandescent (labeled with 250W max.)	1 = Reflector	<b>BB</b> = Black / Black	<b>B</b> = Black	<b>AC</b> = Aircraft cable
NYLI-6P Pendant <sup>1</sup>	<b>L(XX)</b> = LED specific	2 = Baffle	<b>WW</b> = White / White	<b>W</b> = White	(cable mount only)
NYLI-6S Surface	(labeled with lower wattage for LED lamps, replace XX with desired wattage)				
NYLI-6W Wall Mount					

Example: **NYLI-6C1L20WWAC** = 6" Medium Base Cylinder, Cable Mount, Labeled for 20W max., White Reflector / White Flange with White Cylinder, Aircraft Cable