

Mirror Installation Instructions

F08

CAUTION: FAILURE TO INSTALL THIS PRODUCT PROPERLY MAY RESULT IN PERSONAL INJURY OR PROPERTY DAMAGE. We recommend installation by a qualified individual trained in the building trade.

This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*


Component Parts

- A Anchor
- B Z Strip
- C Screw
- D Hanger strip
- E Felt pads (4)

To Install

Caution: Mirror is heavy. Make sure the mounting surface is in good repair and capable of supporting the weight of the mirror. If in doubt, consult a qualified builder. Attaching mirror directly to a framing member is recommended. If attaching directly to a framing member, omit anchor (A) from the installation.

1. Place Z strip (B) against wall at the desired location and mark locations of anchors. Be sure Z strip is level when marking.
2. Install anchors (A), if applicable, by threading directly into the drywall using a number 2 Phillips screwdriver.
3. Install screws (C) through Z strip (B) and into each anchor or directly into a framing member.
4. Mount the 4 felt pads (E) on the corners facing the wall.
5. Hang mirror on Z strip by placing the hanger strip (D) between the lip of the Z strip and the wall.

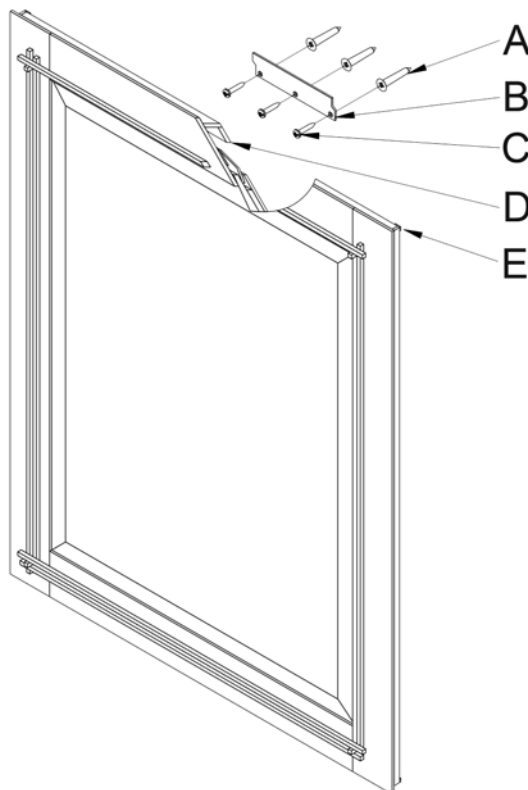

* Hubbardton Forge will not be liable for injury or damage caused by improper installation or use of this product.