

Installation manual for

9210D28AB, 9210D28AB-GT

9210D28DB, 9210D28DB-GT

9210D28FG, 9210D28FG-GT

9210D28PW, 9210D28PW-GT

RC/EC/SA/SS

Dimensions : D28" H31" L10

Collection : Rosalia

Bulb Type : E12 bulb not included

Lamp Weight :31LBS

Total Weight :40LBS




Thank you for choosing our product(s).



Our Company is actively involved in every step of the production.

Our product(s) are designed to be utilized for every application that graces your home or business.

We pride ourselves in providing the most prompt and courtesy service to all of the valued customers.

Please find the enclosed detailed instructions and read carefully for proper installation. If you have any questions, our professional customer service team is committed to assisting you, please call our toll free HOTLINE AT:



1-888-388-3390   **US**

9210D28 D28" H31" L10

SAFETY

Warning: MAKE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF BY EITHER REMOVING THE FUSE OR TURNING OFF THE CIRCUIT BREAKER.

CAUTION

- Before assembling the lighting fixture, please read all instructions carefully.
- All frame & crystal components are fragile, please handle with care.
- Required supply circuit : 110 - 130V/60Hz
- Labeled wires are "L" for live wire, "N" for neutral wire, "E" for ground wire.
- Never install fixture on damp ceiling, the room should be dry and well ventilated
- All electrical components must be installed by a licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes.

Unpack the Package

Please open the box carefully and check all the items are inside the box. If you have any installation, assembling and missing parts questions, please call our Customer Service department at 1-888-388-3390. Please have model number(at the front page), where you purchase from and any other relevant information ready, our customer service team will provide comprehensive and worry free service to our valued customers.

01

9210D28 D28" H31" L10

Returns and Conditions of Warranty

Returns must be pre-authorized by contacting our customer service department at the address on the reverse side. Returns will only be accepted with a written return merchandise authorization and return shipping charges pre-paid. We reserved the right to inspect all returned merchandise to fully determine the nature of any defect. This guarantee shall not apply to any product that has been changed, altered or otherwise modified, nor shall it apply to any product that has been repaired or altered by anyone other than a pre-authorized facility. We will not be responsible for any breakage or damages incurred during transit, nor for crystal parts or metal frame part that have been subject to misuse, negligence, accident or inappropriate handling. Also, we will not be held responsible for damage incurred during improper installation or wiring by others, nor for damages resulting from a failure to follow the recommended maintenance or installation procedures. This guarantee is issued in lieu of any and all other guaranteed or warranty, whether written or implied and any and all other obligations or liabilities. Further, we neither authorize nor permit any other person or firm to assume for us, any liability in connection with the sale of our products.

02

9210D28 D28" H31" L10

Elegant Lighting Warranty

The finish and frame of your new chandelier or fixture are warranted for a period of two (2) years from the date of purchase. Our company will, at its option, repair or replace any frame that has a defect in the materials or workmanship during the warranty period. All crystals are guaranteed for their original quality during the life of the chandelier. Breakage is not covered by this warranty.

To make a claim under this warranty, contact our customer service department at the address and phone number shown below. A written return authorization form will be sent to you with specific instructions.

CUSTOMER SERVICE DEPARTMENT
500-550 E. Erie Avenue
Philadelphia, PA 19134
Tel : 215-423-8880
Fax : 215-423-8882
















9210D28 D28" H31" L10


















Step 1

Please use the parts list to ensure you are not missing any parts.

9210D28

PARTS LIST

Part #	Picture	Description	Qty	Check list
ZA		Canopy cover Ø6" (Canopy part)	1	
ZB		Crossbar 4" (Canopy part)	1	
ZC		Canopy ring (Canopy part)	1	
ZD		Canopy lock (Canopy part)	1	
ZE		L59" CHAIN05T Twist Design	1	
ZF		Power Cord 12' /SPT-2 18# clear/gold/brown	1	
P01		loop	1	
P02		Scroll Arm	8	
P03		Ground Screw	9	
P04		Around Metal plate	1	
P05		Receiver bowl Ø5.5"	1	
P06		Mid Column	1	
P07		Mid Column	1	
P08		Receiver bowl Ø6.3"	1	
P09		thread pipe	1	

Part #	Picture	Description	Qty	Check List
P10		Hex nut	4	
P11		Hex nut	1	
P12		thread pipe	1	
P13		Cast Column break	1	
P14		Hickey	1	
P15		Hex nut	11	
P16		Receiver bowl $\phi 6.3"$	1	
P17		thread pipe	1	
P18		Cast Bottom Fintal	1	
P19		$\phi 7/8 \times 4"$ candle cover metal	10	
P20		Socket	10	
P21		metal washer	10	
P22		Cast Socket cover	10	
P23		Cast Bobèche	10	
P24		thread pipe	10	
P25		Cast Arm	10	
P26		thread pipe	10	

Cleaning and Maintenance of Chandelier Frame

The finish on our chandelier frames and fixture frames is protected by a durable coating of lacquer. To clean, use a clean soft, dry cloth. Do not use any metal polishes, cleaners, abrasives or any substance which could remove the protective finish.

Failure to follow these instructions automatically voids the guarantee.

Cleaning and Maintenance of Crystals

Wet a soft cotton fabric in clean warm water and wipe gently, then polish with a dry soft cotton fabric.

To Order Crystal Replacement Parts

Should you require replacement crystals or pins (the metal connectors attaching the crystals), contact the store where the product was purchased or contact us at the address shown on the reverse side. For ease of ordering, you may use the original crystal trimming instructions provided with this product and circle the items you wish to order, indicating the quantity by writing the number needed adjacent to the circle and faxing it to our customer service department at 215-423-8882. You will be contacted with prices prior to shipment. All orders must be pre-paid.

9210DD28 D28' H31' L10















Congratulations !

You are now done installing your Elegant Lighting fixture. Sit back and admire each crystal as it will become the statement piece for your room/house.

If you require any additional assistance, please contact us at 1-888-388-3390.

Thank you.

9210DD28 D28' H31' L10

Part #	Picture	Description	Qty	Check list
P27		Spring Seat	10	
P28		Quick Link	2	
A		2024-14#+1050-14##8 +911-2.5"	8	
B		1050-14##4+2024-14## +1050-14##4	8	
C		1050-14#+911-2.5"	8	
D		1050-14##33	20	
E		1050-14#+911-2"	40	
F		1050-14#+2024-14## +1050-14#+911-3"	10	
G		1050-14##2+2024-14## +1050-14#+911-3"	10	
H		1050-14##8+911-3"	10	
I		1050-14##11+911-3"	5	
J		1050-14##10+701-40##	1	
K		1050-14##12	10	
L		1050-14##8	10	

Frame Assembly Instructions

Installation:


Please read all instructions carefully. Before you proceed to install, make sure that the power supply is turned off and remains off until installation is complete. Please note that each part has been assigned a number. Please proceed in a numerical order.

1. Part P04-P27 all assembly already
2. Fasten the fixture loop (P01) to hang the whole fixture
3. Install the scroll arm (P02) on the top round metal plate (P04)
4. Follow the crystal instruction to hang the crystal

11

Step 3

Frame Assembly Diagram

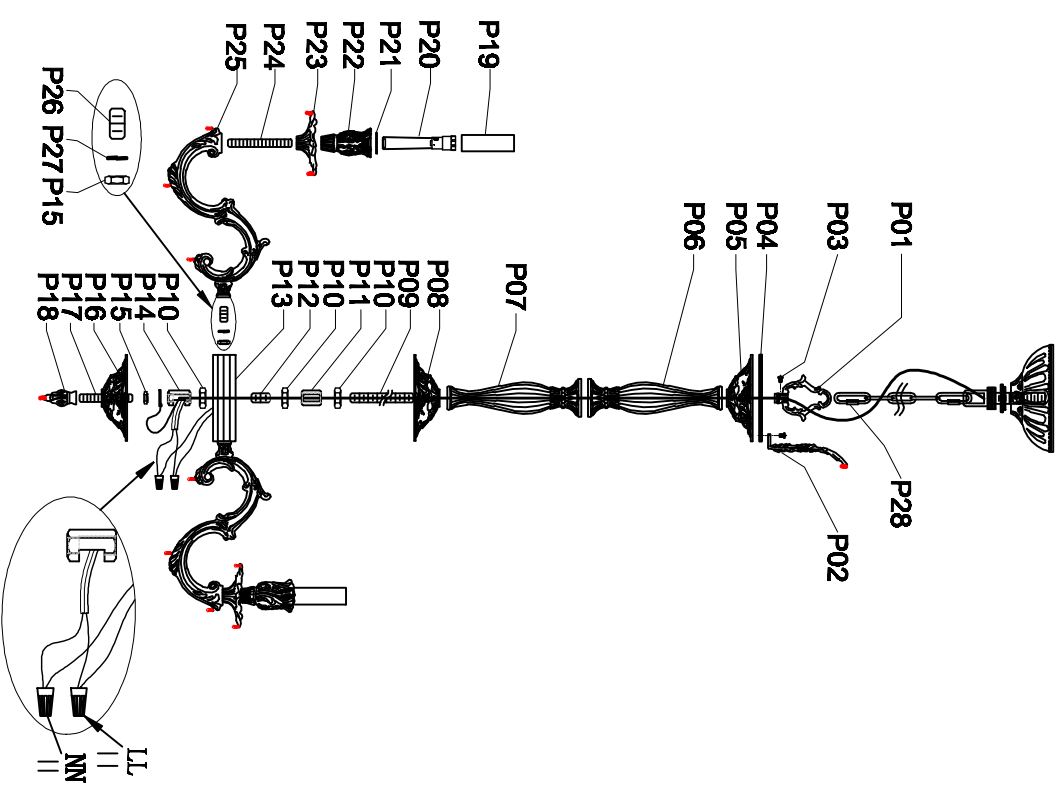

12

9210D28 D28" H31" L10

IMPORTANT: Test sockets with bulb before dressing the fixture.


1. Attach the crossbar to the electrical box.
2. Pass the lamp wire and ground wire through the loop, canopy ring and center hole of canopy cover.
3. Screw 2.5" threaded pipe into the crossbar and fasten with hex-nut.
4. Pull wires up through the nipple.
5. Screw loop only onto threaded pipe.
6. Hang the fixture on chain.
7. Make the electrical connections as detailed in the drawing above.
8. Secure the canopy cover with threaded canopy ring

13


9210D28 D28" H31" L10

Step 4

Crystal Dressing Diagram




When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves. So as to prevent any damage or smudging on the crystals.

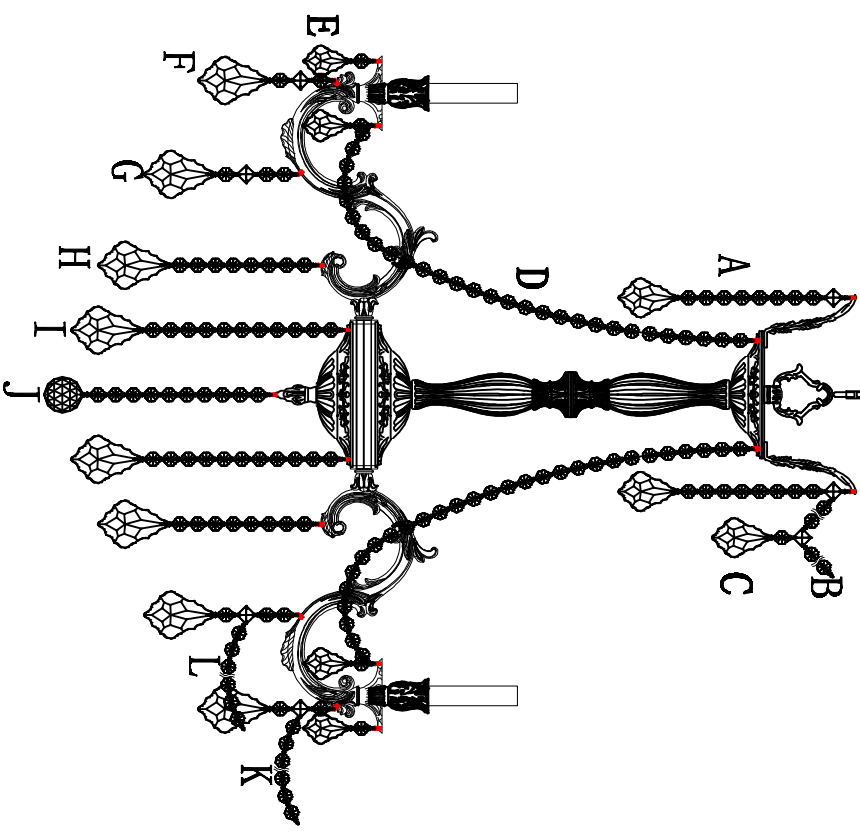

Connect both ends of B with A
Connect both ends of L with G

Connect both ends of K with F

14

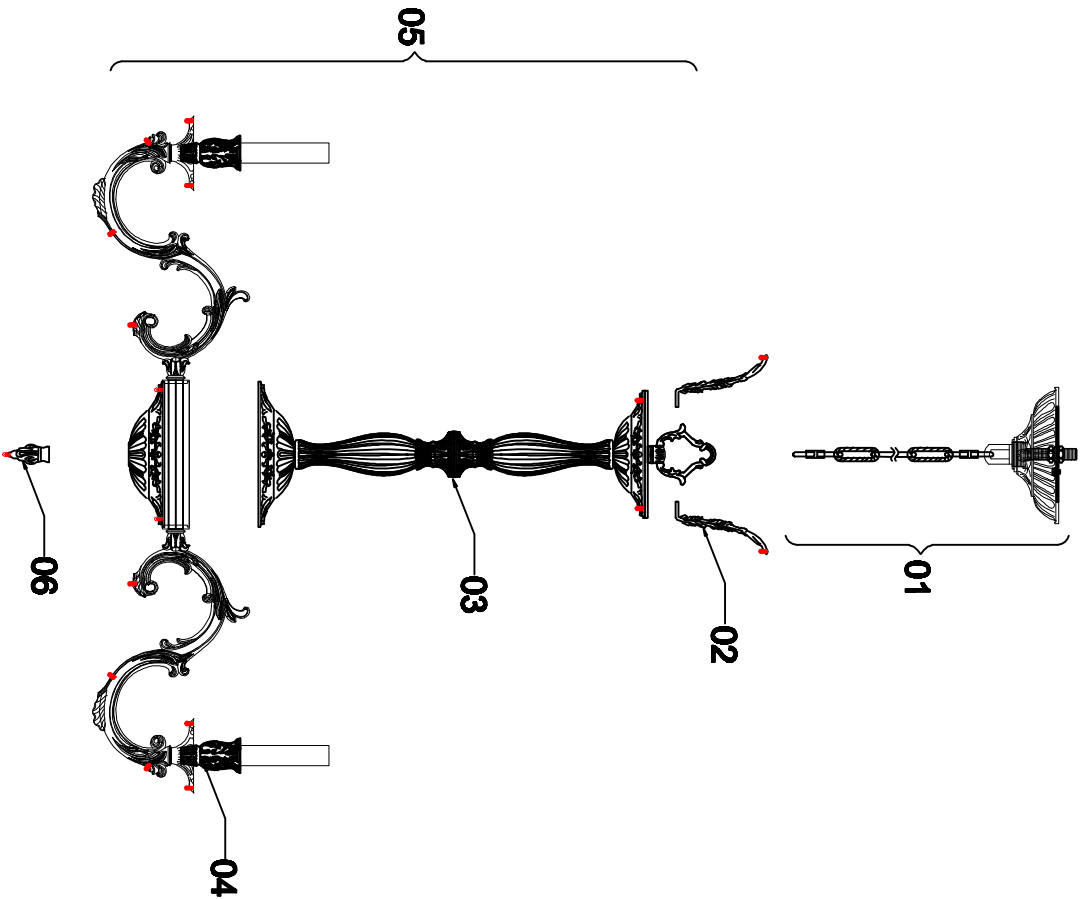

Frame Assembly Instructions

Installation:

Please read all instructions carefully. Before you proceed to install, make sure that the power supply is turned off and remains off until installation is complete. Please note that each part has been assigned a number. Please proceed in a numerical order.

1. Install the canopy parts(01).
2. Fix the lamp body(03) on the lamp body(04) then fix the scroll frm(02) into the metal plate.
3. Fix the lamp body(05) on the chain on the chain.
4. Fix the cast bottom finial(06) on the lamp body(04).